

AD 510

Doosan
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$' z' \$z' D:

| | " | kw | " | kw | Amp |
|---------|--------|--------|--------|--------|--------|
| 400/230 | 510,00 | 408,00 | 460,00 | 368,00 | 664,00 |

fPQDE

GC,) &

,) & z

fDF DE

%\$1

% %&

GC" \$(**

z&(

GC

Standard Specifications

z

fl

E

z

z

ALTERNATOR

D; A Ž 5J F

TRANSFER SWITCH

AD 510

Doosan
Mecc Alte
D+' &'

1

| | | | | |
|--------------------------------------|--------|-------------------------|-------|-------|
| Manufacturer | | Doosan | | |
| Model | | DP158LC | | |
| | | %\$ \$' "# " | | |
| | | 449,00 kw [602,00HP] | | |
| | L | 14,618 | | |
| | " | 128 x 142 | | |
| | | 15,0:1 | | |
| | fl # 7 | "# " | 1500 | |
| | fl 7 | L | 22,00 | |
| | | L | 90,00 | |
| AbsorbedAirDischargeReSourceKey.Text | ' # " | 33,10 | | |
| | ' # " | 550,00 | | |
| | ' # " | 88,00 | | |
| | ° C | 529,00 | | |
| | | 24 V d.c. | | |
| | Load | %\$ \$i | '+) |) \$i |
| | # " | 99,60 | 72,90 | 48,90 |

2

| | | | | |
|------|------|-------------|--|--|
| | | Mecc Alte | | |
| | | ECO 40-3S/4 | | |
| | Hz | 50 | | |
| | " | 500,00 | | |
| 7cg' | | 0,80 | | |
| | | 3 | | |
| | fl 7 | 400/230 | | |
| | A | 721,70 | | |


3

| | | fl 7 | | fl 7 | |
|--------|---------|---------|---------|---------|--------|
| | " | " | " | " | L |
| AD 510 | 3150,00 | 3106,00 | 1550,00 | 1994,00 | 700,00 |
| | | fl 7 | | fl 7 | |
| | " | " | " | " | L |
| MS 70 | 4100 | 4460 | 1606 | 2477 | 700 |

AD 510

Doosan
Mecc Alte
D+' &'

1 D+' &'

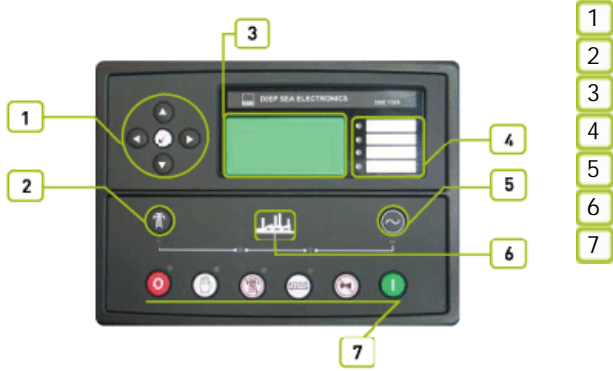

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ ž fI
&&\$' ž
"8G9+' &\$'
8G9+' &\$'
ž
% &1 *(' ž
žFG&' &žFG(,) ž

AD 510

Doosan
Mecc Alte
D+ &

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B '*\$-\$)'\$

6G'9B '*%\$\$\$!*!&

6G'9B '*%\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AD 510

Doosan
Mecc Alte
D+ &''

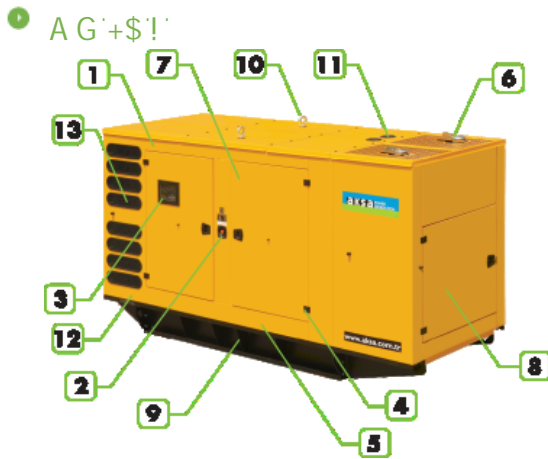

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

| | | |
|-------|---|------|
| | " | 1606 |
| fl "L | " | 4460 |
| fl "L | " | 2477 |
| | L | 700 |