


# AD 700

Doosan  
Mecc Alte  
D+ &



ISO8528

GC, ) &

SZUTEST

GC - \$\$\$%

CE

2000/14/EC

&\$\$\$#( #

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	700,00	560,00	636,00	509,00	918,00

fPQDE

GC, ) &

,) & z

fDF DE

\$\$\$

%&

GC" \$(\*"

z&(

GC

## Standard Specifications

### ALTERNATOR

D: A Z' 5J F

### TRANSFER SWITCH

# AD 700

Doosan  
Mecc Alte  
D+' &'

Manufacturer	Doosan		
Model	P222LE-S		
		% \$\$\$ "# "	
		*\$' \$\$\$ "	
		Q\$, \$\$\$<DQ	
	L	21,930	
	"	128 x 142	
		14,6:1	
	fl # ı	"# "	1500
	fl ı	L	40,00
		L	113,00
AbsorbedAirDischargeReSourceKey.Text	' # "	32,00	
	' # "	675,00	
fl ' # ı	' # "	94,00	
	° C	598,00	
		24 V d.c.	
	Load	%\$\$ı	'+)ı
	# "	)\$ı	
		130,00	99,80
			68,30


	Mecc Alte		
	ECO 40-2L/4		
	Hz	50	
	"	680,00	
7cg'		0,80	
		3	
	ıfl ı	400/230	
	A	981,00	
Temperature		H	

		ıfl ı		ıfl ı	
	"	"	"	"	L
AD 700	4120,00	3621,00	1550,00	2157,00	1000,00
		ıfl ı		ıfl ı	
	"	"	"	"	L
MS 85	5670	5250	1560	2520	1000

# AD 700

Doosan  
Mecc Alte  
D+' &'

## 1 D+' &'

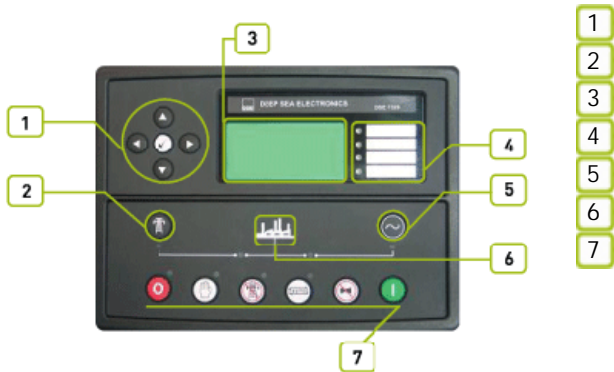

### 1

8G9ž +' &\$ž ) 5ž&&\$#(\$

### 2

### 3

### 4

8G9+' &\$ž &&\$' ž

8G9+' &\$ž

8G9+' &\$ž

% &1 \*('

žFG&' &žFG(, ) ž

AD 700

Doosan  
Mecc Alte  
D+ &

f@.@Bl  
f%&!@t

"z" "z" "z"

f@.@Bl

971

6G'9B '\*\$-)\$

6G'9B '\*\$\$!\*&

6G'9B '\*\$\$!\*(

f&)% +t

f&)(, t

f&% \$t

GA 8

!&+""

)  
&(\$)

ž

ž


ž

% , !&\*(

ž

# AD 700

Doosan  
Mecc Alte  
D+' &''

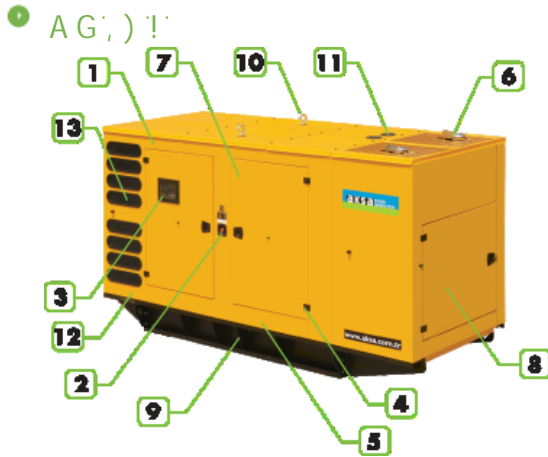

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1560
fl "L	"	5250
fl "L	"	2520
	L	1000