


# AD 660

Doosan  
Mecc Alte  
D+ &



ISO8528

GC, ) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#( #

z) \$ z'z' D:

	"	"	"	"	Amp
400/230	660,00	528,00	611,00	488,00	881,00

fP GDE

GC, ) &

,) & z

fDF DE

%\$!

% %&

GC" \$(\*"

z&(

GC

## Standard Specifications

z

fl

E

z

z

## ALTERNATOR

D: A Z'5J F

## TRANSFER SWITCH

# AD 660

Doosan  
Mecc Alte  
D+' &'

1

Manufacturer		Doosan		
Model		P222LE		
		%\$\$' "# "		
		)+(Z\$\$' "		
		G* - Z\$\$< DQ		
	L	21,930		
	"	128 x 142		
		15,0:1		
	fl # ı	"# "	1500	
	fl ı	L	40,00	
		L	113,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	38,00		
	' # "	650,00		
fl ' # ı	' # "	117,50		
	° C	580,00		
		24 V d.c.		
	Load	%\$\$ı	'+)ı	)\$ı
	# "			
		134,00	97,60	65,80

2

		Mecc Alte		
		ECO 40-1,5L/4		
	Hz	50		
	"	620,00		
7cg'		0,80		
		3		
	ıfl ı	400/230		
	A	894,00		
Temperature		H		

3


		ıfl ı		ıfl ı	
	"	"	"	"	L
AD 660	4010,00	3470,00	1550,00	2157,00	1000,00
		ıfl ı		ıfl ı	
	"	"	"	"	L
MS 85	5565	5250	1560	2520	1000





# AD 660

Doosan  
Mecc Alte  
D+' &'

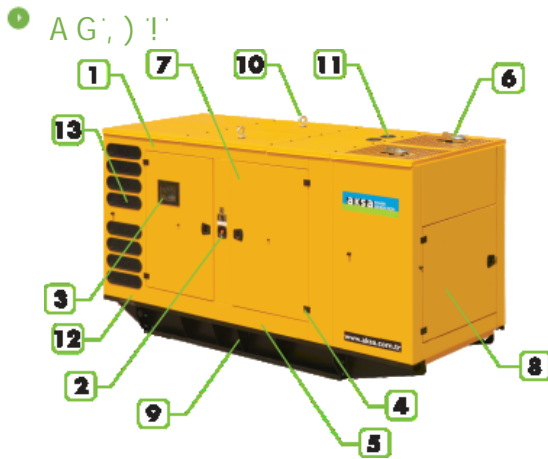

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1560
fl "L	"	5250
fl "L	"	2520
	L	1000