

# AD 770

Doosan  
Mecc Alte  
D+ &



ISO8528

GC, ) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#( #

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	770,00	616,00			

fP GDE

GC, ) &

,) & z

fDF DE

%\$1

% %&

GC" \$(\*\*

z&(

GC

## Standard Specifications

z

fl

E

z

z

## ALTERNATOR

D: A Z 5JF

## TRANSFER SWITCH

# AD 770

Doosan  
Mecc Alte  
D+' &'

Manufacturer	Doosan											
Model	P222LE-II											
		<table border="1"> <tr> <td>%\$\$' "# "</td> <td></td> <td></td> </tr> <tr> <td>*) &amp;\$\$' "</td> <td></td> <td></td> </tr> <tr> <td>Q+( &amp;\$\$&lt; DQ</td> <td></td> <td></td> </tr> </table>		%\$\$' "# "			*) &\$\$' "			Q+( &\$\$< DQ		
%\$\$' "# "												
*) &\$\$' "												
Q+( &\$\$< DQ												
	L	21,930										
	"	128 x 142										
		14,0:1										
	fl # 7	"# "	1500									
	fl 7	L	40,00									
		L	110,00									
AbsorbedAirDischargeReSourceKey.Text	' # "	42,50										
	' # "	829,00										
	' # "	119,90										
	° C	635,00										
		24 V d.c.										
	Load	<table border="1"> <tr> <td>%\$\$i</td> <td>'+) i</td> <td>) \$i</td> </tr> <tr> <td># "</td> <td></td> <td></td> </tr> </table>		%\$\$i	'+) i	) \$i	# "					
%\$\$i	'+) i	) \$i										
# "												
		162,60	119,30 79,50									

	Mecc Alte		
	ECO 40-VL/4		
	Hz	50	
	"	750,00	
7cg'		0,80	
		3	
	fl 7	400/230	
	A	1084,00	


		fl 7		fl 7	
	"	"	"	"	L
AD 770	4720,00	3630,00	1550,00	2163,00	1000,00
		fl 7		fl 7	
	"	"	"	"	L
MS 85	6275	5297	1606	2656	1000





# AD 770

Doosan  
Mecc Alte  
D+ &

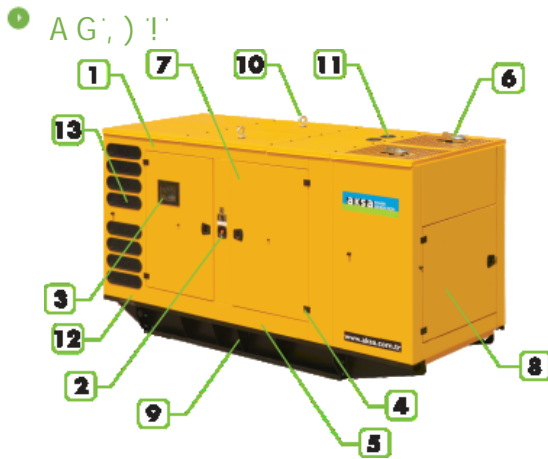

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000