


# APD 385 C

Cummins  
Aksa

D+' &'



**ISO8528** . . . . . GC ; ) &-

**SZUTEST** . . . . . GC ' - \$\$\$%

**CE** . . . . .

**2000/14/EC** &\$\$\$#(\#

z) \$' z' z' D:

	"	"	"	"	Amp
400/230	385,00	308,00	350,00	280,00	505,00

fgDL' . . . . . GC ; ) & . . . . .

fdFDL' . . . . . GC "\$(\*" z&( . . . . . GC

Standard Specifications

(\*#\$\$S . . . . .

fl ! E . . . . .

z . . . . .

z . . . . .

fl " E . . . . .

ALTERNATOR

TRANSFER SWITCH

# APD 385 C

Cummins  
Aksa D+' &'




Manufacturer		Cummins		
Model		NTA 855-G2A		
		% \$ \$ ' "# "		
		' ' & ' "		
		Q ( ) < DQ		
	L	14,00		
	"	140 X 152		
		14.0:1		
	fl # 7	"# "	1500	
	fl 7	L	38,00	
		L	70,00	
Absorbed Air Discharge Resource Key.Text	' # "	24,00		
	' # "	456		
fl ' # 7	' # "	66,00		
	° C	558		
		24 V d.c.		
	Load	% \$ \$ i	' + ) i	) \$ i
	# "			
		72,00	54,20	38,00

		Aksa
	Hz	50
7 cg		0,80
		3
	fl 7	400/230

		fl 7		fl 7	
	"	"	"	"	L
APD 385 C	3250	3000	1150	2000	525
		fl 7		fl 7	
	"	"	"	"	L
AP 330 A-	3920	4500	1470	2250	

D+' &'

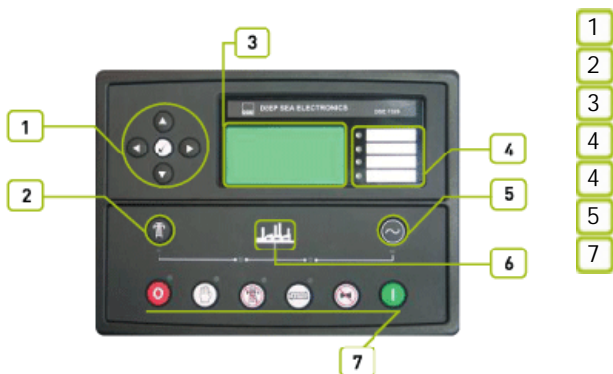

# APD 385 C

Cummins  
Aksa D+' &'



- 1 8G9ž +' &\$ž ) 5ž&&\$#&(\$
- 2
- 3
- 4 8G9+' &\$ ž fl  
) \$ ž " 8G9+' &\$ 8G9+' &\$ ž  
% &I '\* ( žFG&' &žFG(, ) ž ž

# APD 385 C

Cummins  
Akso  
D+' &''



f@#@Bt  
f@#@@t

"z" "z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B'\*\$-\$)'\$

6G'9B'\*\$\$\$!\*!&

6G'9B'\*\$\$\$!\*!(

f&)(, t

f&%) +t

f&% \$t

GA 8

"

%, !&\*\$

)  
&(\$)

ž

ž

!&(

"

ž

ž

"

"

# APD 385 C

Cummins  
Aksa  
D+' &''



5D'' '\$5!''

f1 \$\$!'%%\$\$' E'

ž

ž

ž

ž

ž

ž

ž

&\$\$\$#%/# "

	"	1470
f1 "E	"	4500
f1 "E	"	2250